HIGHLANDER Commercial Platform Lift CPL400 -1400 Harmar

Versatile 4' to 14' Lifting Heights

Safe, smooth and economical, Highlander CPL lifts are designed with a top-mounted motor and electrical box to simplify servicing and protect from standing water. The Highlander product line offers an extensive portfolio of accessories to ensure the best and safest fit for your project.

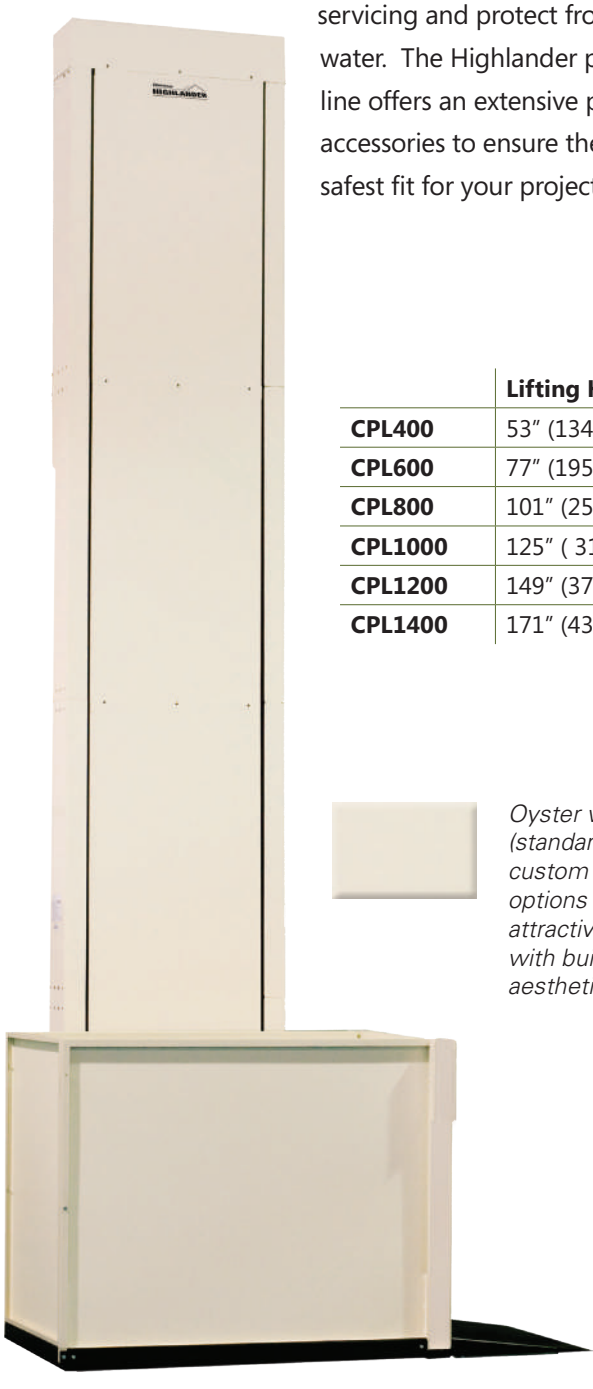

	Lifting Height
CPL400	53" (134.6 cm)
CPL600	77" (195.6 cm)
CPL800	101" (256.5 cm)
CPL1000	125" (317.5 cm)
CPL1200	149" (378.5 cm)
CPL1400	171" (434.3 cm)

Oyster white (standard) or custom RAL color options ensure an attractive blend with building aesthetics.

Features & Benefits

- *Non-skid 36"x54" straight-through platform; other sizes available.*
- *Three-stop capable (optional)*
- *90-degree platform available (optional)*
- *Fixed ramp (auto-folding available)*
- *Solid 42" high guard panels and grab rails*
- *Platform gate (optional)*
- *RAL Custom colors and Coastal Finish available*
- *Optional: 36" x 60" or 42" x 60" with 42" high guard panels*

Specifications	CPL400 - CPL1400
Rated Load:	750 lbs. (340 kg)
Drive:	Belt driven ball screw/90 VDC ⅓ hp motor w/ brake. Optional 24 VDC battery powered unit
Power:	120 VAC 15A grounded circuit 240 VAC Optional
Control Circuit:	24 VAC (Low Voltage Controls)
Standard Platform:	36" x 54"
Footprint:	50" x 54" (36"x 54" model) / with ramp 50" x 70"
Speed:	Estimated Average 10 fpm (.05 m/s)
Controls:	Constant pressure paddle switch with emergency stop (key switch optional)
Manual Lowering:	Provided
Safety Design:	ASME A18.1, Section 2 - Vertical Platform Lifts
Standards:	CSA B44.1/ASME A17.5 - Elevator & Escalator Equipment ETL Listed 3148125
Safety Features	Safety pan, final limit, ball nut safety backup, belt monitor and non skid surface
Warranty	2-year parts (1-year on outdoor units w/o outdoor package)