
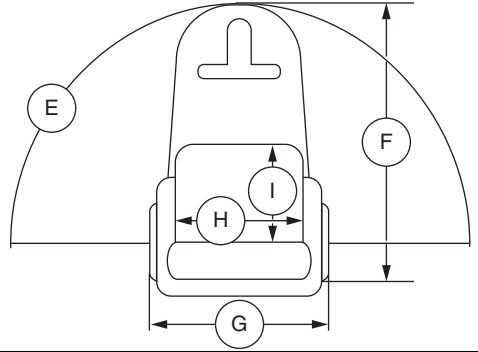


# PRODUCT SPECIFICATIONS SHEET

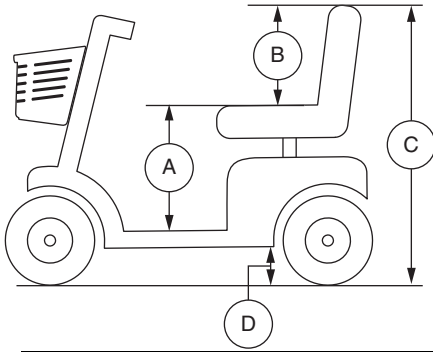

Model Numbers	<b>3-wheel: 73; 4-wheel: 74</b>
Class	A
Weight Capacity	325 lbs. (147 kg); 23 stone 3 lbs.
Speed (Maximum) <sup>1</sup>	US/Canada: 4.7 mph (7.56 km/h) International: 4 mph (6.4 km/h)
D Ground Clearance <sup>2</sup>	3- and 4-wheel: 3 in. (7.62 cm) at mid-frame 1.5 in. (3.8 cm) at motor
E Turning Radius <sup>2</sup>	3-wheel: 36 in. (91.4 cm) 4-wheel: 50.5 in. (128.3 cm)
F Overall Length <sup>2</sup>	3-wheel: 42 in. (106.7 cm) 4-wheel: 43 in. (109.2 cm)
G Overall Width <sup>2</sup>	3- and 4-wheel: 21.25 in. (54 cm)
Tires <sup>1</sup>	3-wheel: Front: 3 in. x 8 in. (20.3 cm) 4-wheel: Front: 3 in. x 9 in. (22.9 cm) solid 3- and 4-wheel: Rear: 3 in. x 9 in. (22.9 cm) solid
Range Per Charge <sup>1, 4</sup>	3-wheel: (18 Ah) Up to 12.7 miles (20.5 km) 4-wheel: (18 Ah) Up to 12 miles (19.3 km) (20 Ah) Up to 12.5 miles (20.2 km)
Total Weight Without Batteries <sup>5</sup>	3-wheel: 92.8 lbs. (41.8 kg) 4-wheel: 100 lbs. (44 kg)
Heaviest Piece When Disassembled (Front Section)	3-wheel: 35.8 lbs. (16.2 kg) 4-wheel: 44 lbs. (20 kg)
H Standard Seating	Type: Folded Material: Black Vinyl Width: 17 in. (43.18 cm) Depth: 17 in. (43.18 cm) Weight: 23 lbs. (10 kg)
I Drive System	Rear-wheel drive, sealed transaxle, 24-volt DC motor
Dual Braking System	Regenerative and electromechanical
Battery Requirements <sup>3</sup>	Type: Two 12-volt, deep-cycle Size: 18 Ah or 20 Ah
Battery Pack Weight <sup>6</sup>	18 Ah battery pack: 27.4 lbs. (12.4 kg) 20 Ah battery pack: 29.5 lbs. (13.4 kg)
Battery Charger	2 amp off-board charger
Maximum Allowable Incline	6° (10.5%)
Maximum Angle Capacity	9° (15.8%)
Maximum Obstacle Climbing Ability	2 in. (5 cm)
A Seat to Floor Height	3- and 4-wheel: 17 - 18 in. (43.2 - 45.7 cm)
B Seat Height	3- and 4-wheel: 14 in. (35.5 cm)
C Overall Height	3- and 4-wheel: 35 - 36 in. (88.9 - 91.4 cm)

<sup>1</sup> Varies with user weight, terrain type, battery amp-hour rating (Ah), battery charge, battery condition, tire type and tire condition. This specification can be subject to a variance of +10%, -5%.

<sup>2</sup> Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or -) 3%.

<sup>3</sup> AGM or Gel-Cell type required. See III. "Batteries and Charging".

<sup>4</sup> Tested in accordance with ANSI/RESNA, WC Vol 2, Section 4 & ISO 7176-4 standards. Results derived from theoretical calculation based on battery specifications and drive system performance. Test conducted at maximum weight capacity.

<sup>5</sup> Includes standard seat.

<sup>6</sup> Battery weight may vary based on manufacturer.

**NOTE: This product conforms to all applicable ANSI/RESNA testing requirements and ISO 7176 series EN12184 standards. All specifications subject to change without notice.**

Document Information: Rev A/July 2013

\* I NFI NFB3254 \*