
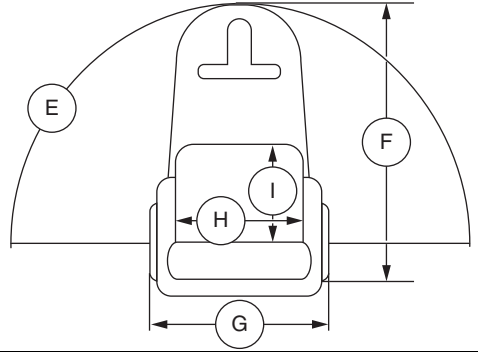


PRODUCT SPECIFICATIONS SHEET

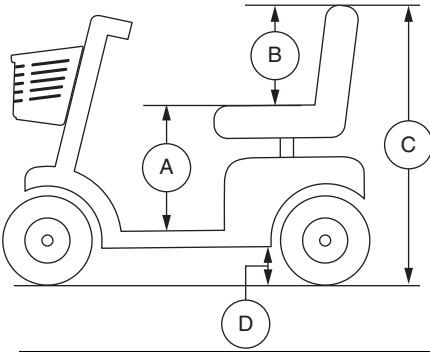

Model Numbers	3-wheel: 40X; 4-wheel: 44X
Class	A
Weight Capacity	260 lbs. (118 kg); 18 stone 8 lbs.
Speed (Maximum)¹	4 mph (6.4 km/h)
Ground Clearance²	3- and 4-wheel: 2.25 in. (5.7 cm) at mid-frame 1.25 in. (3.2 cm) at motor
Turning Radius²	3-wheel: 33 in. (83.8 cm) 4-wheel: 44.125 in. (112 cm)
Overall Length²	3-wheel: 37 in. (94 cm) 4-wheel: 39.5 in. (100.3 cm)
Overall Width²	3- and 4-wheel: 19.5 in. (49.5 cm)
Tires¹	3-wheel: Front: 2 in. x 8 in. (20.3 cm) 4-wheel: Front: 2 in. x 7 in. (17.8 cm) solid 3- and 4-wheel: Rear: 2.5 in. x 8 in. (20.3 cm) solid
Range Per Charge^{1, 4}	3-wheel: (12 Ah) Up to 6.9 miles (11 km) (18 Ah) Up to 10.9 miles (17.55 km) 4-wheel: (12 Ah) Up to 7.2 miles (11.5 km) (18 Ah) Up to 11.4 miles (18.4 km)
Total Weight Without Batteries⁵	3-wheel: 76 lbs. (34.5 kg) 4-wheel: 80 lbs. (36.3 kg)
Heaviest Piece When Disassembled (Front Section)	3-wheel: 29.5 lbs. (13.4 kg) 4-wheel: 33 lbs. (15 kg)
Standard Seating	Type: Folded Material: Black Vinyl Width: 17 in. (43.18 cm) Depth: 17 in. (43.18 cm) Weight: 23 lbs. (10.4 kg)
Drive System	Rear-wheel drive, sealed transaxle, 24-volt DC motor
Dual Braking System	Regenerative and electromechanical
Battery Requirements³	Type: Two 12-volt, deep-cycle Size: (Standard) 12 Ah; (Optional) 18 Ah
Battery Pack Weight⁶	Standard: 12 Ah battery pack: 19.5 lbs. (8.8 kg) Optional: 18 Ah battery pack: 29.5 lbs. (13.4 kg)
Battery Charger	2 amp off-board charger
Maximum Allowable Incline	6° (10.5%)
Maximum Angle Capacity	6° (10.5%)
Maximum Obstacle Climbing Ability	2 in. (5 cm)
Seat to Floor Height	3- and 4-wheel: 15.75 - 17.75 in. (40.05 - 43.81 cm)
Seat Height	3- and 4-wheel: 14.25 in. (36.2 cm)
Overall Height	3- and 4-wheel: 33.25 - 35.25 in. (84.4 - 89.5 cm)

¹ Varies with user weight, terrain type, battery amp-hour rating (Ah), battery charge, battery condition, tire type and tire condition. This specification can be subject to a variance of +10%, -5%.

² Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or -) 3%.

³ AGM or Gel-Cell type required. See III. "Batteries and Charging".

⁴ Tested in accordance with ANSI/RESNA, WC Vol 2, Section 4 & ISO 7176-4 standards. Results derived from theoretical calculation based on battery specifications and drive system performance. Test conducted at maximum weight capacity.

⁵ Includes standard seat.

⁶ Battery weight may vary based on manufacturer.

NOTE: This product conforms to all applicable ANSI/RESNA testing requirements and ISO 7176 series EN12184 standards. All specifications subject to change without notice.

Document Information: Rev A/September 2013

* I N F I N F B 3 2 7 8 *